


 [www.randrade.com](http://www.randrade.com) - TLF. 986 600 286

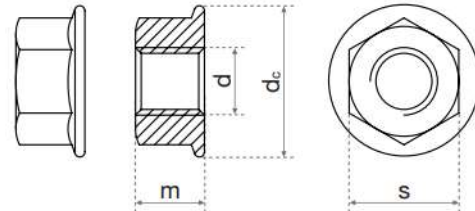

d	M4	M5	M6	M8	M10	M12
dcmax.	10	11.8	14.2	17.9	21.8	26
mmax.	4.65	5	6	8	10	12
s	7	8	10	13	15	18

**COMPOSICIÓN QUÍMICA (en %)**

	C	Mn	Si	P	S	Cr	Ni	Cu
Mínimo	--	--	--	--	--	15,00	8,000	--
Máximo	0,100	2,000	1,000	0,050	0,030	20,00	19,00	4,000

**CARACTERÍSTICAS MECÁNICAS**

	Mínimo	Máximo
Resistencia Tracción – N/mm <sup>2</sup>	700,00000	--
Limite Elasticidad – N/mm <sup>2</sup>	450,00000	--