

# ACEROS PARA TRABAJO EN FRÍO

## Formatos disponibles

Productos largos\*

Chapas

\* ) Presented data refer exclusively to long products. Please observe the detailed explanations at the end of the data sheet (pdf).

## Descripción

BÖHLER K110 - Es el estándar de acero ledeburítico con 12 % de cromo de estabilidad dimensional.

- Especialmente adecuado para templar al aire.
- Buena tenacidad.
- Alta resistencia al desgaste.
- Permite la nitruración al baño.

Para herramientas de corte (matrices y punzones), herramientas para estampación, para trabajar madera, cizallas para cortar chapa de poco espesor, herramientas para laminar roscas, herramientas para estirar, para embutición profunda y extrusión en frío. Para la industria farmacéutica y cerámica, para cilindros de laminación en frío, para trenes de laminación de cajas múltiples, herramientas de medición y moldes de plástico pequeños que requieran gran resistencia al desgaste.

## Método de obtención

Convencional

## Propiedades

- > Resistencia al desgaste : buena
- > Estabilidad dimensional : buena

## Aplicaciones

- |  |                                       |   |
|--|---------------------------------------|---|
| > Cuchillas de máquinas (fabricantes)                            | > Laminación                          | > Conformado en frío                          |
| > Acuñado  | > Corte fino / Troquelado / Estampado | > Compactación de polvo                       |
| > Componentes estándar (moldes, placas, expulsos, punzones)      | > Tornillos y cilindros               | > Componentes para la industria del reciclaje |
| > Componentes para equipos bajo tierra (perforación, ejes, etc.) | > Rodillos                            | > Componentes de desgaste                     |
| > Componentes generales de ingeniería mecánica                   | > Thread rolling (ES)                 |   |

Datos técnicos

Designación		Estándares	
1.2379	SEL	4957	EN ISO
X153CrMoV12	EN		
~T30402	UNS		
D2	AISI		

Composición Química

C	Si	Mn	Cr	Mo	V
1,55	0,30	0,30	11,30	0,75	0,75

Características

	Resistencia a la compresión	Estabilidad dimensional durante el tratamiento térmico	Tenacidad	Resistencia al desgaste abrasivo	Resistencia al desgaste adhesivo
<b>BÖHLER K110</b>	★★	★★★	★	★★★	★★
<b>BÖHLER K100</b>	★★	★★	★	★★★	★★
<b>BÖHLER K105</b>	★★	★★	★	★★	★★
<b>BÖHLER K107</b>	★★	★★	★	★★★	★★
<b>BÖHLER K190 MICROCLEAN®</b>	★★★★★	★★★★★	★★★★★	★★★★★	★★★★★
<b>BÖHLER K294 MICROCLEAN®</b>	★★★★★	★★★★★	★★★	★★★★★	★★★★★
<b>BÖHLER K340 ECOSTAR®</b>	★★★	★★★	★★	★★	★★
<b>BÖHLER K340 ISODUR®</b>	★★★	★★★★★	★★★	★★★	★★★★★
<b>BÖHLER K346</b>	★★★	★★★	★★★	★★★★★	★★
<b>BÖHLER K353</b>	★★	★★★	★★	★★	★★
<b>BÖHLER K360 ISODUR®</b>	★★★	★★★★★	★★★	★★★★★	★★★★★
<b>BÖHLER K390 MICROCLEAN®</b>	★★★★★	★★★★★	★★★★★	★★★★★	★★★★★
<b>BÖHLER K490 MICROCLEAN®</b>	★★★★★	★★★★★	★★★★★	★★★★★	★★★★★
<b>BÖHLER K497 MICROCLEAN®</b>	★★★★★	★★★★★	★★★	★★★★★	★★★★★
<b>BÖHLER K888 MATRIX</b>	★★★★★	★★★★★	★★★★★	★★	★★
<b>BÖHLER K890 MICROCLEAN®</b>	★★★★★	★★★★★	★★★★★	★★★	★★★

**Estado de suministro**

<b>recocido</b>	
Dureza (HB)	máx. 250


**Tratamiento térmico**

<b>Recocido</b>		
Temperatura	800 a 850 °C	Slow controlled cooling in furnace at a rate of 10 to 20 °C/hr (18 to 36 °F/hr) down to approximately 600 °C (1112 °F)    Further cooling in air.

<b>Alivio de tensiones</b>		
Temperatura	650 a 700 °C	After through heating, hold in neutral atmosphere for 1-2 hours.    Slow cooling in furnace    Intended to relieve stresses caused by extensive machining or in complex shapes.

<b>Temple y revenido</b>		
Temperatura	1.030 a 1.070 °C	Quenching: Oil, salt bath (220 to 250 °C or 500 to 550 °C   428 to 482 °F or 932 to 1022 °F), gas, compressed or still air. Tools of intricate shape or with sharp edges should preferably be hardened in air.    Holding time after temperature equalization: 15 to 30 minutes.    After hardening, tempering to the desired working hardness according to the tempering chart.

**Tempering chart**

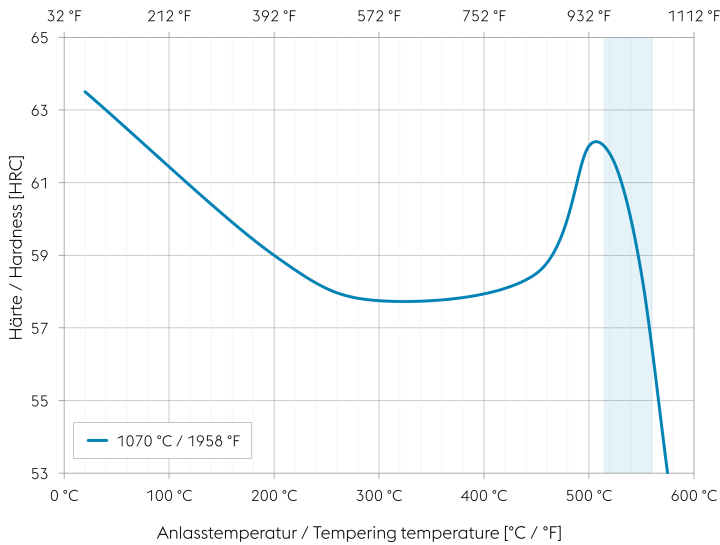

Specimen size: square 20 mm (0,787 inch)

Slow heating to tempering temperature immediately after hardening.

Time in furnace 1 hour for each 20 mm (0,787 inch) of workpiece thickness but at least 2 hours.

Please refer to the tempering chart for guide values for the achievable hardness after tempering.


It is recommended to temper at least three times above the secondary hardness maximum.

Cooling in air to room temperature after each tempering step is recommended.

Tempering for stress relieving 30 to 50 °C (86 to 122 °F) below the highest tempering temperature.

Recommended tempering temperature range is indicated by the blue area in the chart.

Continuous cooling CCT curves

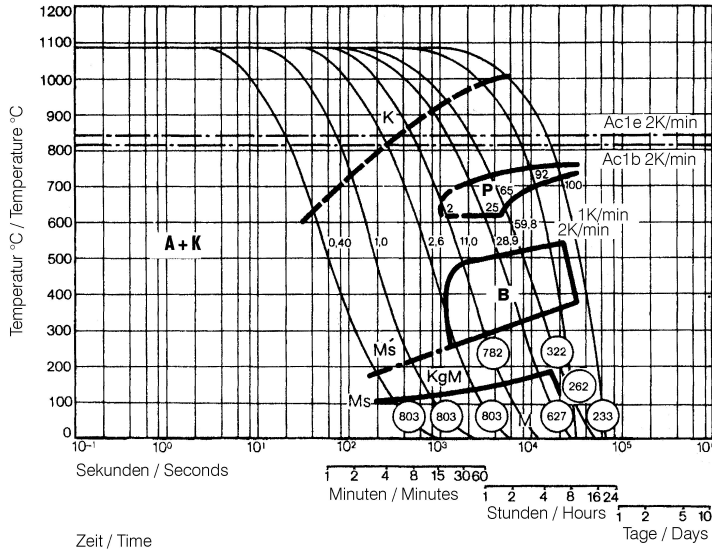

Austenitising temperature: 1080 °C (1976 °F)  
Holding time: 30 minutes

O Vickers hardness


2...100 phase percentages

0.40...59.8 cooling parameter  $\lambda$ , i.e. duration of cooling from 800 to 500 °C (1472 to 932 °F) in  $s \times 10^{-2}$

1...2 K/min... cooling rate in the range of 800 to 500 °C (1472 to 932 °F)

- A... Austenite
- K... Carbide
- P... Pearlite
- B... Bainite
- M... Martensite
- Ms... Martensite starting temperature

Quantitative phase diagram

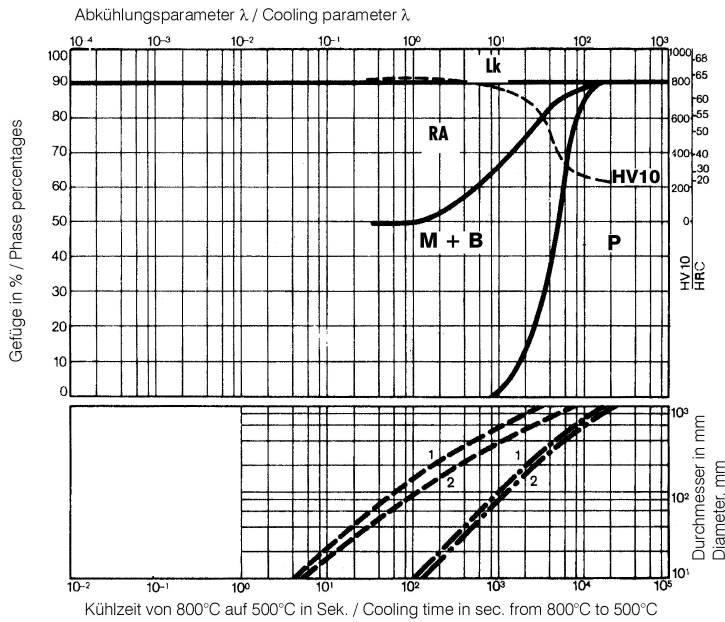

HV10... Vickers Hardness

Lk... Ledeburite carbide

RA... Residual austenite

M... Martensite


B... Bainite

P... Pearlite

- - - Oil cooling
- · - Air cooling

- 1... Edge or face
- 2... Core


**Isothermal TTT curves**

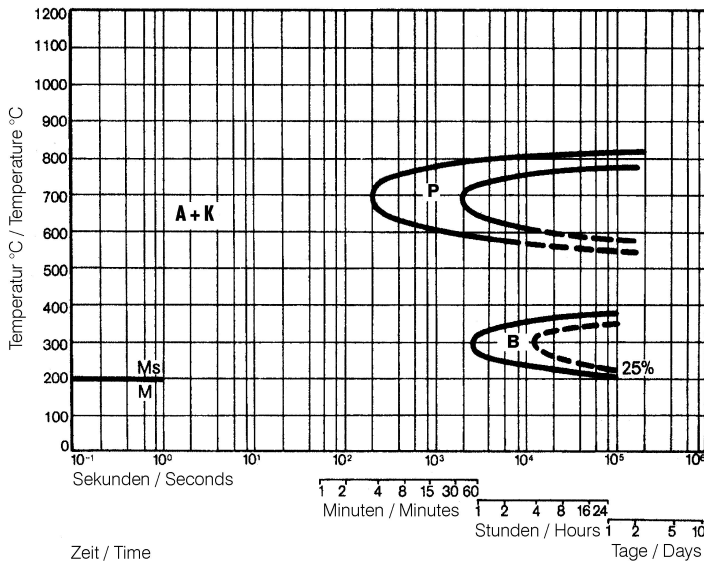

Austenitising temperature: 1020 °C / 1868 °F  
Holding time: 30 minutes

- A... Austenite
- K... Carbide
- P... Pearlite
- B... Bainite
- M... Martensite
- Ms... Martensite starting temperature


**Influence of work diameter on core hardness and hardness penetration**

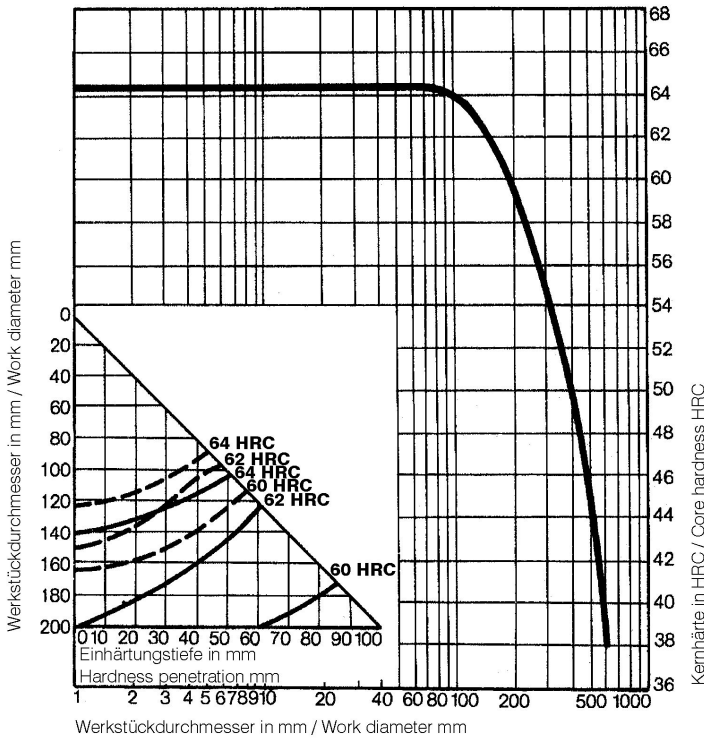

Quenched from: 1030 °C / 1886 °F

- Quenchant:
- Oil
- - - - Air

## Heat treatment sequence

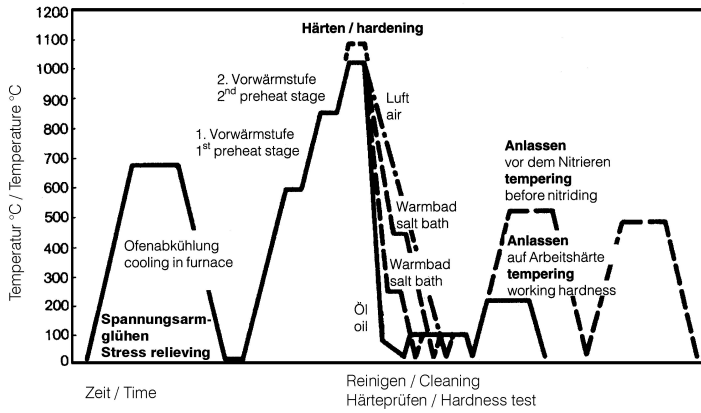

## Propiedades físicas

Temperatura (°C)	20
Densidad (kg/dm <sup>3</sup> )	7,67
Conductividad térmica (W/(m.K))	23,9
Calor específico (kJ/kg K)	0,47
Resistencia eléctrica específica (Ohm.mm <sup>2</sup> /m)	0,65
Módulo de elasticidad (10 <sup>3</sup> N/mm <sup>2</sup> )	200

## Expansión térmica

Temperatura (°C)	100	200	300	400	500	600	700
Expansión térmica (10 <sup>-6</sup> m/(m.K))	11	11,4	11,9	12,2	12,7	12,8	12,1

**Long Products:** For additional specifications and technical requirements, please contact our regional voestalpine BÖHLER sales companies.

**Sheet & Plates:** Product Variant may differ in terms of melting process, technical data, delivery, and surface condition as well as available product dimensions. Please contact voestalpine BÖHLER Bleche GmbH & Co KG.

*The data contained in this brochure is merely for general information and therefore shall not be binding on the company. We may be bound only through a contract explicitly stipulating such data as binding. Measurement data are laboratory values and can deviate from practical analyses. The manufacture of our products does not involve the use of substances detrimental to health or to the ozone layer.*